



## Measuring for Replacement Spring Axles

**Straight Axle**

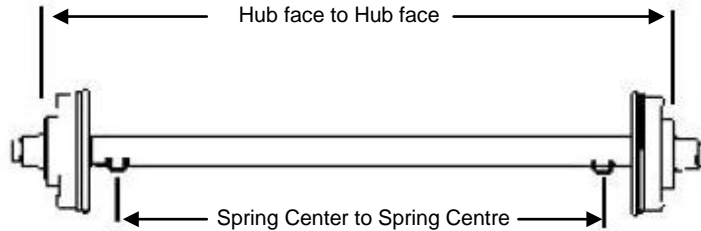

**4" Drop Axle**

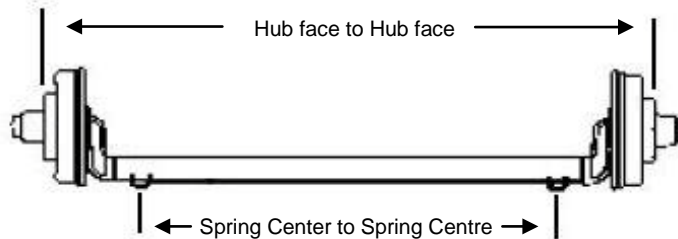

Date: \_\_\_\_\_

PO# \_\_\_\_\_

Customer Name: \_\_\_\_\_ Contact \_\_\_\_\_

Telephone: \_\_\_\_\_ Fax: \_\_\_\_\_

Capacity (2000LB, 3500LB, 6000LB, 7000LB, etc) \_\_\_\_\_

Lube Type \_\_\_\_\_

(Grease, EZ or Nev-r- lube Oil Bath)

Bolt Pattern (4 Bolt, 5 Bolt\*, 6 Bolt, 8 Bolt) \_\_\_\_\_

Stud Size \_\_\_\_\_

(1/2", 9/16" Etc)

Hub face to Hub face \_\_\_\_\_

Quantity \_\_\_\_\_

Brake Type \_\_\_\_\_

(Idler, Electric, Hydraulic, Hydraulic Free Backing, Etc)

Straight \_\_\_\_\_ 4" Drop \_\_\_\_\_

Spring Center to Spring Center \_\_\_\_\_

Beam Diameter (1 3/4", 2 3/8", 3", Etc) \_\_\_\_\_

Under slung or Over slung \_\_\_\_\_

(Springs mounted under axle or over axle)

Other Information \_\_\_\_\_

**\*Please Note**

Standard 5 bolt pattern on trailer axles is **5 on 4 1/2"** bolt circle.  
 There are also:  
     5 on 4 3/4"  
     5 on 5"  
     5 on 5 1/2"

Please ensure you order the correct 5 bolt pattern.

Email completed form to [info@trailercanada.com](mailto:info@trailercanada.com)